

BERKEL

Always The Original

**FUTURA
PROFESSIONAL**





BERKEL

Always The Original

THE FUTURA RANGE

The Futura meat slicers are designed and manufactured to ensure reliability, efficiency and durability. They can withstand heavy-duty use and are ideal for large businesses, retail shops, small and large supermarket chains. In addition to being an extremely efficient tool, Futura is a stylish element of design for any shop.

The Futura range is made of anodised aluminium. Three versions are available: straight feed for raw meat, cured meats, and gravity. Each model is available in three cutting capacities: Medium (M), Large (L) and Extra Large (XL).

BERKEL

Always The Original



Wide spaces allow for quick and easy cleaning and sanitization, saving time and energy whilst complying with all hygiene and healthcare standards.



The built-in anticorodal sharpener with bronze bushings is activated by one single lever for sharpening and deburring. This facilitates the sharpening operation hence increasing the efficiency and durability of the blade.



The third-generation 100Cr6 steel blade has an innovative profile to reduce friction with food, thereby ensuring a perfect cut and reducing waste.





The meat pusher allows you to cut the product down to the last slice, reducing waste considerably. Interchangeable meat pusher plates adapt to the different consistency and surface of the product to be cut.



The use of new materials, polymeric compounds, and special food-grade plastics, ensure high performance at low costs, thanks to the optimization of the whole.



The switch is IP65 certified. The co-moulded polycarbonate inserts are backlit to indicate machine operation. The machine is provided with low-voltage switches. The innovative design prevents build-up of dirt and facilitates sanitization.



The thickness adjustment unit, as the handles, feature a new ergonomic design created specifically for all those who use the meat slicer for many hours a day.






In the Gravity version, the meat table has an ideal inclination to facilitate positioning and removal of the product to be cut.



The Straight Feed for Meat XL version has a large and easily removable meat table, which allows for perfect cleaning and sanitization.



FUTURA **SALUMERIA**
STRAIGHT FEED FOR CURED MEAT



DIMENSIONS

	BSFSM	BSFSL	BSFSXL
A	176 mm	200 mm	245 mm
B	251 mm	285 mm	310 mm
C	211 mm	240 mm	272 mm
D	445 mm	590 mm	610 mm
E	326 mm	377 mm	430 mm
F	538 mm	655 mm	758 mm
G	450 mm	497 mm	565 mm
H	413 mm	453 mm	534 mm
I	665 mm	740 mm	788 mm
L	765 mm	824 mm	874 mm
M	606 mm	693 mm	750 mm

SPECIFICATIONS

	BSFSM		BSFSL		BSFSXL	
Circular cutting capacity (∅)	211 mm		240 mm		275 mm	
Rectangular cutting capacity	251 x 190h mm		285 x 200h mm		310 x 245h mm	
Max slice thickness	17 mm		17 mm		17 mm	
Motor rating	0,18 kW	nd	0,24 kW	0,27 kW	0,55 kW	0,55 kW
Blade diameter	280 mm		315 mm		360 mm	
Electrical specifications	230V 50Hz	400V 50Hz	230V 50Hz	400V 50Hz	230V 50Hz	400V 50Hz
	Single-phase	Three-phase	Single-phase	Three-phase	Single-phase	Three-phase
Also available with: 110V voltage; 60Hz frequency						
Weight	34 Kg		40 Kg		46 Kg	


SHIPPING SPECIFICATIONS

Packing Dimensions

Models	Length	Width	Height	Weight
BSFSM	750 mm	630 mm	600 mm	40 kg
BSFSL	870 mm	750 mm	670 mm	45 kg
BSFSXL	900 mm	800 mm	670 mm	51 kg



FUTURA **MACELLERIA**
STRAIGHT FEED FOR RAW MEAT

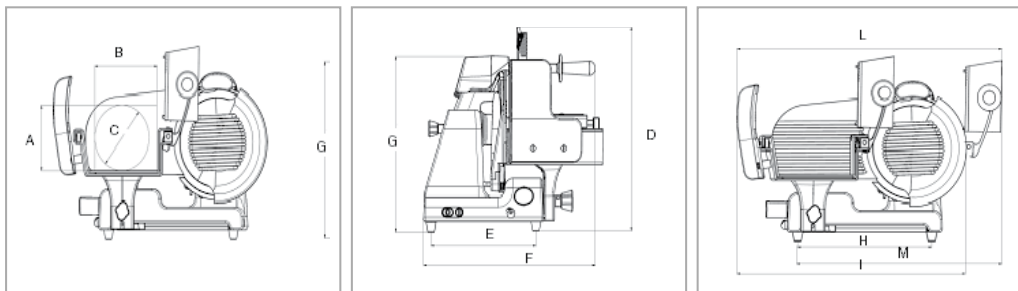

DIMENSIONS

	BSF MM	BSF ML	BSF MXL
A	178 mm	210 mm	232 mm
B	253 mm	270 mm	320 mm
C	213 mm	240 mm	272 mm
D	505 mm	634 mm	650 mm
E	326 mm	377 mm	430 mm
F	590 mm	620 mm	667 mm
G	450 mm	497 mm	565 mm
H	413 mm	453 mm	534 mm
I	663 mm	726 mm	818 mm
L	690 mm	836 mm	962 mm
M	535 mm	777 mm	812 mm

SPECIFICATIONS

	BSFMM		BSFML		BSF MXL	
Circular cutting capacity (∅)	211 mm		240 mm		275 mm	
Rectangular cutting capacity	245 x 185h mm		270 x 200h mm		320 x 235h mm	
Max slice thickness	17 mm		17 mm		17 mm	
Motor rating	0,18 kW	0,27 kW	0,24 kW	0,27 kW	0,55 kW	0,55 kW
Blade diameter	280 mm		315 mm		360 mm	
Electrical specifications	230V 50Hz Single-phase	400V 50Hz Three-phase	230V 50Hz Single-phase	400V 50Hz Three-phase	230V 50Hz Single-phase	400V 50Hz Three-phase
	Also available with: 110V voltage; 60Hz frequency					
Weight	34 Kg		40 Kg		46 Kg	




SHIPPING SPECIFICATIONS

Packing Dimensions

Models	Length	Width	Height	Weight
BSFMM	750 mm	630 mm	600 mm	40 kg
BSFML	870 mm	750 mm	670 mm	45 kg
BSF MXL	900 mm	800 mm	670 mm	51 kg



FUTURA **GRAVITÀ**



DIMENSIONS

	BSFGM	BSFGL	BSFGXL
A	149 mm	185 mm	225 mm
B	260 mm	282 mm	318 mm
C	198 mm	230 mm	269 mm
D	418 mm	670 mm	690 mm
E	326 mm	377 mm	430 mm
F	466 mm	593 mm	630 mm
G	418 mm	510 mm	540 mm
H	413 mm	453 mm	534 mm
I	707 mm	714 mm	805 mm
L	762 mm	833 mm	926 mm
M	560 mm	698 mm	788 mm

SPECIFICATIONS

	BSFGM		BSFGL		BSFGXL	
Circular cutting capacity (∅)	200 mm		228 mm		269 mm	
Rectangular cutting capacity	255 x 145h mm		282 x 228h mm		305 x 235h mm	
Max slice thickness	17 mm		17 mm		17 mm	
Motor rating	0,18 kW	nd	0,24 kW	0,27 kW	0,55 kW	0,55 kW
Blade diameter	280 mm		315 mm		360 mm	
Electrical specifications	230V 50Hz Single-phase	400V 50Hz Three-phase	230V 50Hz Single-phase	400V 50Hz Three-phase	230V 50Hz Single-phase	400V 50Hz Three-phase
	Also available with: 110V voltage; 60Hz frequency					
Weight	28 Kg		34 Kg		40 Kg	

SHIPPING SPECIFICATIONS

Packing Dimensions

Models	Length	Width	Height	Weight
BSFGM	750 mm	630 mm	600 mm	34 kg
BSFGL	870 mm	750 mm	670 mm	40 kg
BSFGXL	900 mm	800 mm	670 mm	46 kg



The technical features and appearance of the products may be subject to changes without prior notice.

BERKEL

Always The Original

Van Berkel International S.r.l.

Via Varese, 14

21041 Albizzate (VA)

T + 39 0331 990825

F +39 0331 984659

info@berkelinternational.com

www.theberkelworld.it