



## TWO ZONE INDUCTION BOILING TOP



Induction Boiling Top

### KEY FEATURES

- 2 x 3.5kW or 2 x 5kW models available
  - choose the ideal model for your outlet
- 270mm diameter energy efficient heat zones
  - instant on, fast heat up, reduced energy usage
- Heavy duty, ceramic glass hob plate
  - spillages can simply be wiped away
- Variable control settings
  - fast, controllable cooking
- In-built pan detection
  - no pan = no wasted energy
- Low heat emissions
  - contributes to a cooler kitchen
- Laser-etched control icons
  - permanent, indelible markings

### MODELS and ACCESSORIES

**E3901i** - Two zone induction boiling top (2 x 3.5kW)

**E3902i** - Two zone induction boiling top (2 x 5kW)

- Fully integrated extended flue
- Stand
- Suiting kit

### INSTALLATION NOTES

Adequate ventilation must be provided to supply sufficient fresh air and to allow easy removal of any such products that may present a risk to health. Please consult current legislation for details that relate to specific locations.

Install unit on a level, fireproof surface in a well-lit position. If floor is made of a combustible material, local fire requirements must be checked to ensure compliance.

A clearance of 150mm should be observed between appliance and any combustible wall.






# DOMINATOR PLUS

## TWO ZONE INDUCTION BOILING TOP

### MODEL DIMENSIONS (in mm)

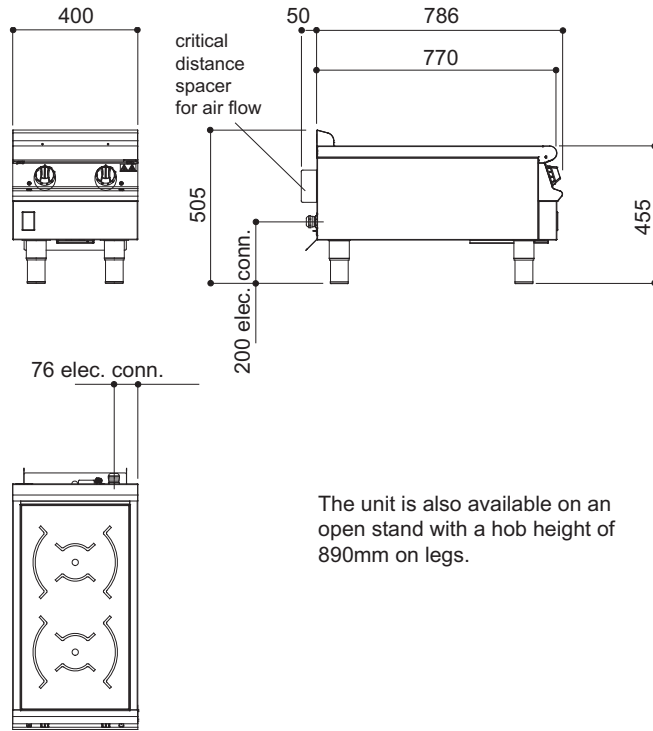

The unit is also available on an open stand with a hob height of 890mm on legs.

### SPECIFICATION DETAILS

	<b>E3901i</b>	<b>E3902i</b>
Electrical rating (kW)	7	10
Electrical supply voltage	400V 3~	400V 3~
Required electrical supply (amps)	32	32
Electrical current split (amps)	L1: 10.7 / L2: 10.7 / L3: 10.7	L1: 15.3 / L2: 15.3 / L3: 15.3
Zone rating (kW)	2 x 3.5	2 x 5
Weight (kg)	42	42
Packed weight (kg)	50	50